

# Technical data sheet

## Cable tray MKS 60 A2

Item number: 6056040



MKS 60 = Medium-duty cable tray system with a side height of 60 mm.  
Connecting parts should be ordered in the appropriate quantity.  
Magnetic shield insulation without cover 20 dB, with cover 50 dB.



- A2 Stainless steel
- 2B Bright, treated

Master data		
Item number	6056040	
Description 1	Cable tray MKS	
Description 2	perforated	
Manufacturer	OBO	
Dimension	60x300x3000	
Colour	stainless steel	
Material	Stainless steel	
Surface	Bright, treated	
Surface standard		
Smallest sales unit	3	
Unit of quantity	Metre	
Weight	304.667 kg	
Weight unit	kg/100 m	
CO Footprint (GWP) Cradle-to-Gate	17,2745 kg COe / 1 Meter	


# Technical data sheet

## Cable tray MKS 60 A2

Item number: 6056040



### Dimensions



Length	3,000 mm
Length	10 ft
Width	300 mm
Width	12 in
Height	60 mm
Height	2 in
Plate thickness	0.04 in
Plate thickness	1 mm
Dimension B	300 mm
Maß W	300 mm

### Technical data

Connector version	Without connectors
Mounting system fastening type	Floor Ceiling Wall
Walkable	no
Maintain electrical functions	no
With cover	no
Mounting perforation in base	yes
NATO hole pattern	no
Usable cross-section	178 cm <sup>2</sup>
Usable cross-section	17800 mm <sup>2</sup>
Rustproof steel, pickled	no
Side perforation	yes
Wide-span version	no
Load test type according to IEC 61537	Type II
Type of connector, cable support system	Screwed

# Technical data sheet


## Cable tray MKS 60 A2

Item number: 6056040



### Loads

Insertable support spacings, min.	1.5 m
Insertable support spacings, max.	2.5 m
Support spacing 1.5 m	1.5 kN/m
Support spacing 1.75 m	1.25 kN/m
Support spacing 2.0 m	1 kN/m
Support spacing 2.5 m	0.5 kN/m

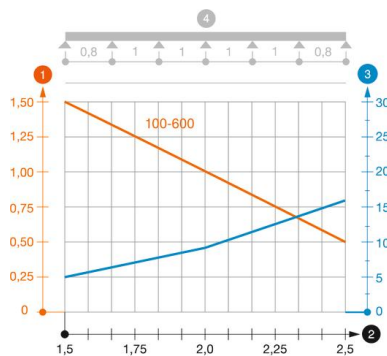

### Load diagram, cable tray, type MKS 60 VA

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width