

# Technical data sheet

## Falling vertical bend EI60 for PLCS D061220 fire protection duct

Item number: 7217944



Falling vertical bend for PYROLINE® Con S EI60 fire protection duct, type PLCS D061220, consisting of fibreglass light concrete which is resistant to water and frost for the creation of vertical changes of direction (45°) in the duct. Mounted connectors ensure quick mounting in situ, whilst loosely placed covers ensure quick inspection and reassignment.  
Including connection screws and sealing strips.  
Including connection screws and sealing strips.




Fibreglass lightweight concrete

### Master data

|                     |                                 |
|---------------------|---------------------------------|
| Item number         | 7217944                         |
| Type                | PLCS VF061220                   |
| Description 1       | Vertical bend falling EI60      |
| Description 2       | for PLCS D061220                |
| Manufacturer        | OBO                             |
| Dimension           | 200x120                         |
| Colour              | Grey                            |
| Material            | Fibreglass lightweight concrete |
| Smallest sales unit | 1                               |
| Unit of quantity    | Piece                           |
| Weight              | 860 kg                          |
| Weight unit         | kg/100 pc.                      |

### Dimensions

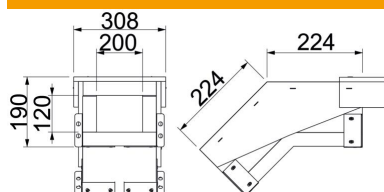

|                     |           |
|---------------------|-----------|
| External dimensions | 308 x 190 |
| Internal dimensions | 200 x 120 |
| Dimension B         | 308 mm    |
| Dimension b         | 200 mm    |
| Dimension h         | 120 mm    |
| Dimension H         | 190 mm    |
| Dimension L         | 224 mm    |

# Technical data sheet

Falling vertical bend EI60 for PLCS D061220 fire protection duct

Item number: 7217944



## Technical data

|                                       |                                  |
|---------------------------------------|----------------------------------|
| Number of flammable sides             | 4                                |
| Cover fastening                       | Loose                            |
| Classification EI – installation duct | 60                               |
| With perforation                      | no                               |
| Jacketing                             | Without                          |
| Material of the insulation            | Glass-fibre lightweight concrete |
| Angle of the bend                     | 45 °                             |