


# Technical data sheet

## Cable ladder with trapezoidal rungs, standard FT

Item number: 7097441

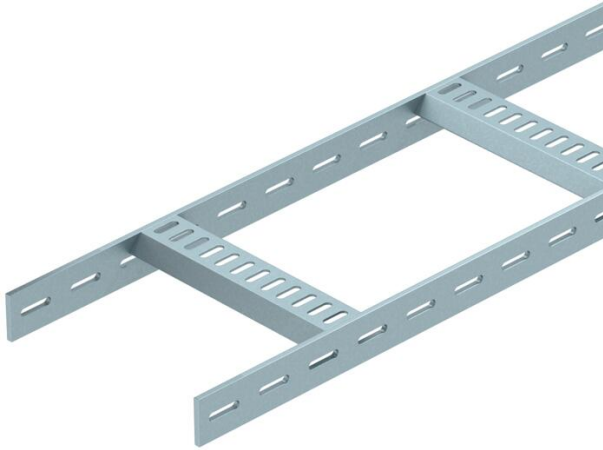

Shipbuilding cable ladder with perforated side rail of side height 40 mm with welded, perforated trapezoidal rungs which open in a downwards direction. Load tested according to IEC in conjunction with connector, type SLV. The shipbuilding cable ladder, including fittings, is also available in stainless steel on request. Powder coating according to RAL colours possible.



St	Steel
FT	Hot-dip galvanised

### Master data

Item number	7097441
Description 1	Cable ladder, shipbuilding
Description 2	with trapezoidal rung
Manufacturer	OBO
Dimension	40x410x3000
Colour	zinc
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	3
Unit of quantity	Metre
Weight	413 kg
Weight unit	kg/100 m
CO Footprint (GWP) Cradle-to-Gate	9,6353 kg COe / 1 Meter

