

Technical data sheet

PV surge protection V20 2pole 1000 V DC



Item number: 5094617



V20 surge arrester, Type 2, for earthed photovoltaic systems

- Complete unit consisting of varistor arrester with cut-off unit
- For PV systems directly earthed on DC side to VDE 0100-712 (EN 50539-12)
- Surge protection equipotential bonding to VDE 0100-443 (IEC 60364-4-44)
- V20-C 3-PH-1000 tested to EN 50539-11 (VDE / KEMA)
- Arresting capacity to 40 kA (8/20) per pole
- Low DC voltage protection level: < 4.0 kV and Voc max = 1,000 V DC
- With visual function display for use in distributor housings

Application: Directly earthed PV systems with or without isolated lightning protection system



Master data		
Item number	5094617	
Type	V20-C 2-PH-1000	
Description 1	SurgeController V20	
Description 2	two-pole for photovoltaics	
Manufacturer	OBO	
Dimension	1000V DC	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	27 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	0,8912 kg COe / 1 Piece	


Technical data sheet

PV surge protection V20 2pole 1000 V DC

Item number: 5094617



Dimensions

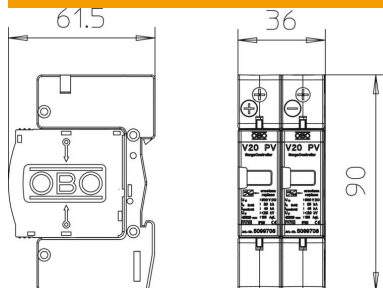

Technical data

Response time	<25 ns
Blow-out	no
Version for	2-pole for earthed PV systems
Pole version	2
Structural width in division units (division unit, 17.5 mm)	2
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Remote signalling	no
Maximum continuous voltage DC	1000 V
Conductor cross-section, flexible (fine-wire), min.	25 mm ²
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	2.5 mm ²
Lightning protection zone LPZ	1→2
Max. mains-side overcurrent protection	125
Maximum back-up fuse	125 A
Maximum discharge current (8/20 µs)	40 kA
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 µs)	20 kA
Network form	Other
DC network form	yes
Test class, type 2	yes
Protection rating	IP20
Protection level	≤4,0
Signalling on device	Visual
SPD to EN 61643-11	Type 2
SPD to IEC 61643-1	Class II