

# Technical data sheet

## End piece, trunking type WDK 100230

Item number: 6163076



End piece to close the WDK trunking.  
The end pieces are pushed onto the WDK trunking and are fixed on the floor connector by spring force.



**PVC** Polyvinylchloride

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6163076                  |
| Type                               | WDK HE100230CW           |
| Description 1                      | End piece                |
| Manufacturer                       | OBO                      |
| Dimension                          | 100x230mm                |
| Colour                             | Cream; RAL 9001          |
| Material                           | Polyvinylchloride        |
| Smallest sales unit                | 5                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 10.237 kg                |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2615 kg CO2e / 1 Piece |


# Technical data sheet

End piece, trunking type WDK 100230

Item number: 6163076



## Dimensions

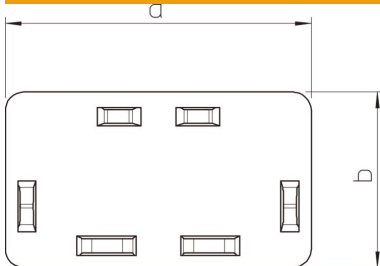

|             |        |
|-------------|--------|
| Length      | 25 mm  |
| Width       | 230 mm |
| Height      | 100 mm |
| Dimension a | 230 mm |
| Dimension b | 100 mm |
| Dimension H | 230 mm |

## Technical data

|                                   |            |
|-----------------------------------|------------|
| Version for                       | Left/right |
| Fastening type                    | Lockable   |
| Maintain electrical functions     | no         |
| Halogen-free                      | no         |
| Protection rating                 | IP30       |
| Protective film                   | no         |
| Protection rating IK code         | IK04       |
| Permitted temperature range, max. | 60 °C      |
| Permitted temperature range, min. | -5 °C      |