


# Technical data sheet

## T and intersection cover, for trunking type WDK 60090

Item number: 6162215

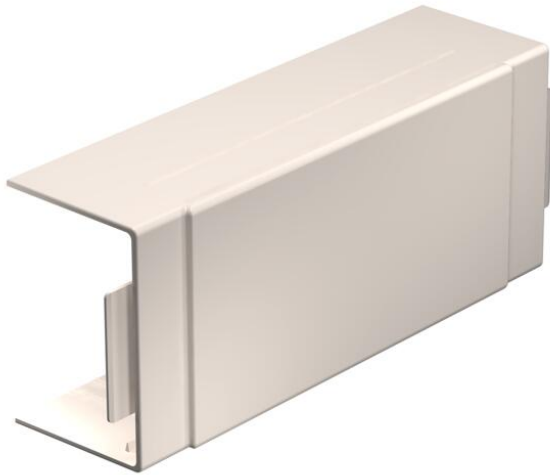

T and intersection cover for changing the direction of the WDK trunking. The fitting is preperforated at the side for the connection of different trunking cross-sections.




**PVC** Polyvinylchloride

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6162215                  |
| Type                               | WDK HK60090CW            |
| Description 1                      | T- and crosspiece cover  |
| Manufacturer                       | OBO                      |
| Dimension                          | 60x90mm                  |
| Colour                             | Cream; RAL 9001          |
| Material                           | Polyvinylchloride        |
| Smallest sales unit                | 2                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 16.992 kg                |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,3394 kg CO2e / 1 Piece |

### Dimensions

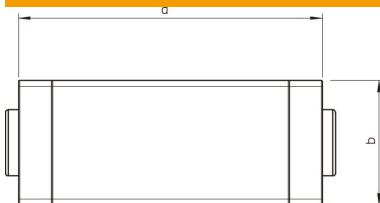

|             |        |
|-------------|--------|
| Length      | 230 mm |
| Width       | 94 mm  |
| Height      | 60 mm  |
| Dimension a | 230 mm |
| Dimension b | 94 mm  |
| Dimension H | 90 mm  |

# Technical data sheet

T and intersection cover, for trunking type WDK 60090

Item number: 6162215



## Technical data

|                                   |              |
|-----------------------------------|--------------|
| Version for                       | Hood fitting |
| Fastening type                    | Lockable     |
| Maintain electrical functions     | no           |
| for duct dimension                | 60 x 90      |
| Protection rating                 | IP30         |
| Protection rating IK code         | IK04         |
| Permitted temperature range, max. | 60 °C        |
| Permitted temperature range, min. | -5 °C        |