

Technical data sheet

AML3518 anchor rail, slot 16.5 mm, A2, unperforated

Item number: 1112007



Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.



A2 Stainless steel

2B Bright, treated

Master data

Item number	1112007
Type	AML3518UP2000A2
Description 1	Profile rail
Description 2	unperforated, slot 16.5mm
Manufacturer	OBO
Dimension	2000x35x18
Material	Stainless steel 1.4301
Surface	Bright, treated
Surface standard	
Smallest sales unit	2
Unit of quantity	Metre
Weight	90 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	4,2834 kg CO2e / 1 Meter


Technical data sheet

AML3518 anchor rail, slot 16.5 mm, A2, unperforated

Item number: 1112007



Dimensions

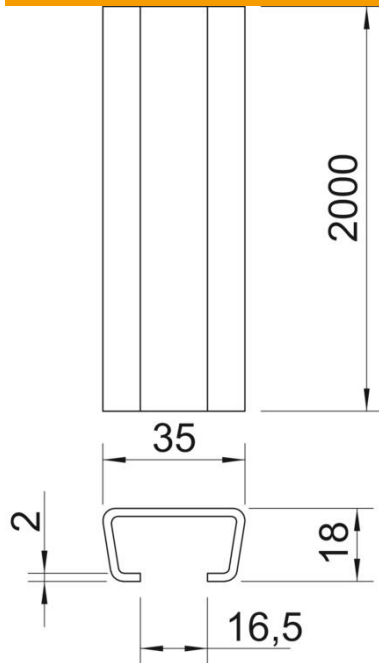

Length	2,000 mm
Width	35 mm
Height	18 mm
Dimension L	2,000 mm

Technical data

Breakable	no
Type of perforation	Without
Version for	Single profile
Maintain electrical functions	no
Material thickness	1.5 mm
With perforation	no
With tothing	no
Profile shape	C profile
Slot width	16.5 mm
Static value A	1.48 cm ²
Static value I _y	0.6 cm ⁴
Static value I _z	2.33 cm ⁴
Static value W _y	0.54 cm ³
Static value W _z	1.33 cm ³