Technical data sheet

MS5030 mounting rail, slot 22 mm, A2, perforated

Item number: 1121499



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.

CE 22 U

A2	Stainless steel
2B	Bright, treated

Master data


Item number	1121499
Type	MS5030P6000A2
Description 1	Profile rail
Description 2	perforated, slot 22mm
Manufacturer	OBO
Dimension	6000x50x30
Material	Stainless steel 1.4301
Surface	Bright, treated
Surface standard	
Smallest sales unit	6
Unit of quantity	Metre
Weight	282.5 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	14,4447 kg CO2e / 1 Meter

Technical data sheet

MS5030 mounting rail, slot 22 mm, A2, perforated

Item number: 1121499

Dimensions

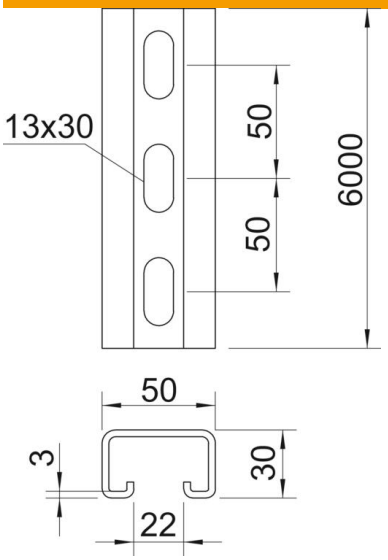

Length	6,000 mm
Width	50 mm
Height	30 mm
Dimension L	6,000 mm

Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	no
Material thickness	3 mm
With perforation	yes
With toothing	no
Profile shape	C profile
ROHS-conformant	yes
Slot width	18 mm
Static value A	3.39 cm²
Static value Iy	3.99 cm⁴
Static value Iz	13.11 cm⁴
Static value Wy	3.95 cm³
Static value Wz	6.38 cm³