# Technical data sheet

## Cable tie, black, UV and weather-resistant

## Item number: 2331918

Cable ties are used for quick, uncomplicated fixing or bundling of cables and pipes to cable support systems or other mounting structures.

UV RESISTANT CE

PA Polyamide

### Master data

| | |
|---|---|
| Item number | 2331918 |
| Type | 565 7.6x300 SWUV |
| Description 1 | Cable ties |
| Description 2 | UV-resistant |
| Manufacturer | OBO |
| Dimension | 7,6x300mm |
| Colour | Black |
| Material | Polyamide |
| Smallest sales unit | 100 |
| Unit of quantity | Piece |
| Weight | 0.334 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,013 kg CO2e / 1 Piece |

### Dimensions

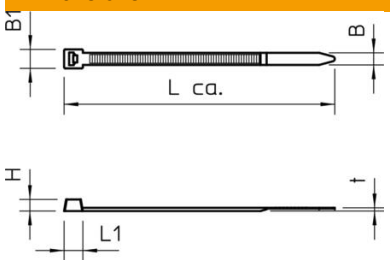


| | |
|---|---|
| Length | 300 mm |
| Width | 7.6 mm |
| Height | 1.6 mm |
| Dimension B | 7.6 mm |
| Dimension L | 300 mm |
| Dimension t | 1.6 mm |

# Technical data sheet

## Cable tie, black, UV and weather-resistant

## Item number: 2331918

### Technical data

| | |
|---|---|
| Version for | Externally toothed |
| Strip closure | Plastic tongue/tab |
| Fastening type | Without |
| Labelling area | Without |
| Halogen-free | yes |
| Releasable lock | no |
| Max. Bundle diameter | 80 mm |
| MIL approval | no |
| Mounting temperature, max. | 90 °C |
| Min. mounting temperature | -30 °C |
| Reflective | no |
| ROHS-conformant | yes |
| Permitted temperature range, max. | 90 °C |
| Permitted temperature range, min. | -30 °C |
| Transparent | no |
| UL approval | yes |
| UV-resistant | yes |
| VG approval | no |
| Tensile strength | 530 N |