

Technical data sheet

Flat conductor, galvanised steel

Item number: 5019347



- Can be used as a conductor and earthing conductor according to DIN EN 62561-2 (VDE 0185-561-2)
- Complies with the requirements of VDE 0185-305 (IEC 62305)
- Zinc coating: $\geq 500 \text{ g/m}^2$ (approx. $70 \text{ }\mu\text{m}$ in mean value)
- For lightning protection, earthing systems and ring equipotential bonding



St

Steel

FT

Hot-dip galvanised

Master data

Item number	5019347
Type	5052 DIN 30X3.5
Description 1	Steel strip
Description 2	50 kg ring
Manufacturer	OBO
Dimension	30x3,5mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	60
Unit of quantity	Metre
Weight	84 kg
Weight unit	kg/100 m


Technical data sheet

Flat conductor, galvanised steel

Item number: 5019347



Dimensions

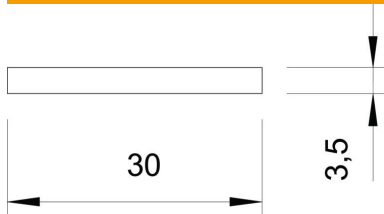

Width	30 mm
Height	3.5 mm
Dimension B	30 mm
Dimension H	3.5 mm

Technical data

Nominal ring (approx. kg)	50
Nominal ring (approx. m)	60
Length tolerance $\pm$	5 %
Cross-section	105 mm ²