

Technical data sheet

Combination arrester, 1-pole NPE

Item number: 5096865



Combination arrester, type 1+2, N+PE for use in TN-S and TT networks.

MCD 125-B/NPE: Coordinated N-PE spark gap, type 1+2 to EN 61643-11. For interface 0 to 2 (LPZ) in accordance with lightning protection zone concept to IEC 62305 and/or VDE 0185-305.

- Arresting capacity 125 kA (10/350 µs)
- Incl. plug caps for labelling the connections
- Protection level < 1.5 kV, allows device protection
- Encapsulated, non-extinguishing spark gap

Application: Industrial systems and buildings with external lightning protection of Classes I to IV.



Master data		
Item number	5096865	
Type	MCD 125-B NPE	
Description 1	CoordinatedLightningController	
Description 2	for N to PE	
Manufacturer	OBO	
Dimension	255V	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	50.9 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	2,4972 kg CO2e / 1 Piece	


Technical data sheet

Combination arrester, 1-pole NPE

Item number: 5096865



Dimensions

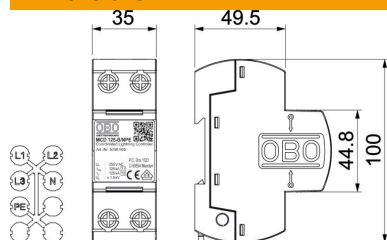

Length	100 mm
Width	35 mm
Height	69 mm

Technical data

Arrester surge current (8/20 µs) [total]	125 kA
Response time	<100 ns
Blow-out	no
Version for	1-pole; 255 V
Pole version	N/PE
Structural width in division units (division unit, 17.5 mm)	2
Operating temperature, max.	85 °C
Operating temperature, min.	-40 °C
Lightning surge current (10/350 µs)	125 kA
Lightning surge current (10/350 µs) [N/PE]	125 kA
Lightning surge current (10/350 µs)	125 kA
Remote signalling	no
Follow current quenching capacity (eff) [N-PE]	0.1 kA
Follow current quenching capacity I _{eff}	0.1 kA
Maximum continuous voltage (N-PE)	255 V
Maximum continuous voltage AC	255 V
Conductor cross-section, rigid (single-wire/multiwire), max.	50 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	10 mm ²
Lightning protection zone LPZ	0→2
Humidity, min.	5 %
Humidity, max.	95 %
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 µs)	125 kA
Nominal discharge current (8/20 µs) [N-PE]	125 kA
Nominal voltage AC (50/60 Hz)	230 V
Network form	Other
DC network form	no
IT network form	no
Other network form	no
TN network form	yes
TN-C network form	no
TN-C-S network form	yes

Technical data sheet

Combination arrester, 1-pole NPE

Item number: 5096865



Technical data

TN-S network form	yes
TT network form	yes
OBO_Nominal load current (input/output terminal)	125 A
Pole number	1
Test class, type 1	yes
Test class, type 2	yes
ROHS-conformant	yes
Protection rating	IP20
Protection level [N-PE]	1.5 kV
Signalling on device	None
SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-11	Class I+II
Permitted temperature range, max.	85 °C
Permitted temperature range, min.	-40 °C
Approvals	VDE