

Technical data sheet

LightningController Compact - MCF50

Item number: 5096979



Combination arrester, lightning current and surge protection arrester type 1+2+3

- Protection level < 2.5 kV
- For lightning protection equipotential bonding according to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity 50 kA (10/350) 3+NPE
- Follow current quenching rating Ifi 50 kA, arrester pre-fuse up to 315 A gL/gG
- Complies with the requirements for the use in the pre-meter area according to VDE-AR-N 4100
- Encapsulated non-extinguishing spark gap arrester for the application in distributor housings.


Application: industrial plants and buildings with external lightning protection of the classes III to IV.
Compact protective device



Master data

Item number	5096979
Type	MCF50-3+NPE+FS
Description 1	LightningController Compact
Description 2	3-pole with NPE + RS
Manufacturer	OBO
Dimension	255V
Smallest sales unit	1
Unit of quantity	Piece
Weight	93.5 kg
Weight unit	kg/100 pc.

Dimensions

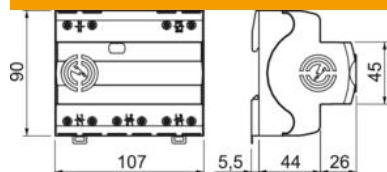

Length	90 mm
Width	107 mm
Height	70 mm

Technical data sheet

LightningController Compact - MCF50

Item number: 5096979



Technical data

Arrester surge current (8/20 µs) [total]	50 kA
Connection cross-section (min.)	1.5 mm²
Connection cross-section, FM terminals, max.	16 AWG
Connection cross-section, FM terminals, max.	1.5 mm²
Connection cross-section, FM terminals, min.	28 AWG
Connection cross-section, FM terminals, min.	0.5 mm²
Response time	<100 ns
Response time [L-N]	<100 ns
Response time [N-PE]	<100 ns
Pole version	3+N/PE
Structural width in division units (division unit, 17.5 mm)	6
Lightning surge current (10/350 µs)	12.5 kA
Lightning surge current (10/350 µs) [L-N/PE]	50 kA
Lightning surge current (10/350 µs) [N/PE]	12.5 kA
Lightning surge current (10/350)	50 kA
Torque	44 Lbs
Torque	5 Nm
Torque for FM terminal	1.7 Lbs
Torque for FM terminal	0.2 Nm
Installation location	Interior
Remote signalling	yes
FM contacts	Changeover
Follow current quenching capacity (eff) [N-PE]	50 kA
Function/defect display	Visual
Housing material surge protection components	PA UL 94 V-0
Combined voltage protection level [L-PE]	2.5 kV
Maximum continuous voltage (L-N)	255 V
Maximum continuous voltage (N-PE)	255 V
Maximum continuous voltage AC	255 V
Short-circuit resistance for max. mains-side overcurrent protection	50 kA eff
Conductor cross-section, flexible (fine-wire), max.	25 mm²
Conductor cross-section, flexible (fine-wire), max.	3 AWG
Conductor cross-section, flexible (fine-wire), min.	16 AWG
Conductor cross-section, flexible (fine-wire), min.	1.5 mm²
Conductor cross-section, rigid (single-wire/multiwire), max.	2 AWG
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm²

Technical data sheet

LightningController Compact - MCF50

Item number: 5096979



Technical data

Conductor cross-section, rigid (single-wire/multiwire), min.	16 AWG
Conductor cross-section, rigid (single-wire/multiwire), min.	1.5 mm ²
Humidity, min.	5 %
Humidity, max.	95 %
Max. mains-side overcurrent protection	315 A
Maximum back-up fuse	315 A
Maximum discharge current (8/20 µs)	50 kA
Maximum discharge current (8/20 µs) [L-N]	50 kA
Maximum discharge current (8/20 µs) [N-PE]	100 kA
Minimum distance	0 mm
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 µs)	35 kA
Nominal discharge current (8/20 µs) [L-N]	35 kA
Nominal discharge current (8/20 µs) [N-PE]	100 kA
Nominal frequency	50 Hz
Nominal voltage AC (50/60 Hz)	230 V
Network form	TN-S, TT
TN network form	yes
TN-C network form	no
TN-C-S network form	yes
TN-S network form	yes
TT network form	yes
Pole number	4
Ports	One-Port SPD
ROHS-conformant	Exempt
Switching power AC	250V/ 1,5A
Switching power DC	250V/ 0,1A
Protection rating	IP20
Protective conductor current	< 5 µA
Protection level	≤1,5 kV
Protection level [L-N]	≤1,5
Protection level [N-PE]	1.5 kV
Signalling on device	Visual
SPD to EN 61643-11	Type 1+2+3
SPD to IEC 61643-11	Class I+II+III
SPD to UL 1449	Type 4
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-40 °C
TOV voltage [L-N] – fail safe mode – 120 min.	442 V
TOV voltage [L-N] – withstand mode – 5 s	440 V
TOV voltage [N-PE] – withstand mode – 200 ms	1200 V