# Technical data sheet

## Cable tray, marine standard FS

## Item number: 6046372

Cable tray for use in ship construction, produced according to the marine standard VG 88900-1.

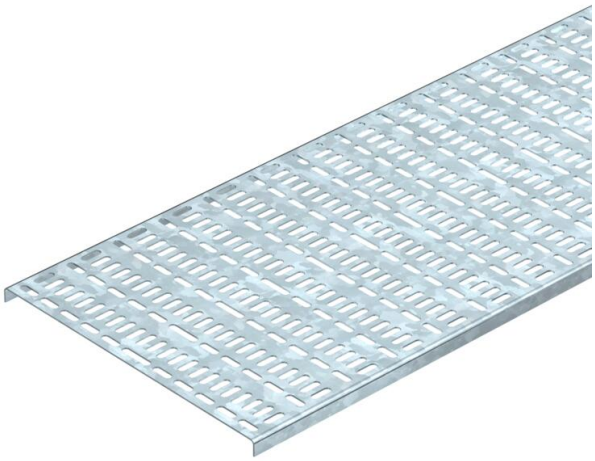

| | |
|---|---|
| St | Steel |
| FS | Strip galvanised |

### Master data

| | |
|---|---|
| Item number | 6046372 |
| Type | MKR 15 075 FS |
| Description 1 | Cable tray marine standard |
| Description 2 | Material thickness 1.25mm |
| Manufacturer | OBO |
| Dimension | 15x75x2000 |
| Colour | zinc |
| Material | Steel |
| Surface | Strip galvanised |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 78.5 kg |
| Weight unit | kg/100 m |
| CO2 Footprint (GWP) Cradle-to-Gate | 2,2319 kg CO2e / 1 Meter |

# Technical data sheet

## Cable tray, marine standard FS

## Item number: 6046372

### Dimensions

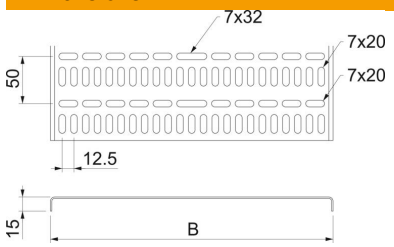


| | |
|---|---|
| Dimension | 15x75 |
| Length | 2,000 mm |
| Width | 75 mm |
| Height | 15 mm |
| Plate thickness | 1.25 mm |
| Dimension B | 75 mm |

### Technical data

| | |
|---|---|
| Connector version | Without connectors |
| Walkable | no |
| Maintain electrical functions | no |
| With cover | no |
| Mounting perforation in base | yes |
| NATO hole pattern | yes |
| ROHS-conformant | yes |
| Rustproof steel, pickled | no |
| Side perforation | no |
| Wide-span version | no |
| Load test type according to IEC 61537 | Type II |
| Type of connector, cable support system | Screwed |

### Loads

| | |
|---|---|
| Support spacing 1.0 m | 0.5 kN/m |
| Support spacing 1.5 m | 0.15 kN/m |