

Technical data sheet

MCR protection for 2-pole power supply with remote signalling, 48 V AC/DC
Item number: 5097822



Surge protection/fine power protection, type 3, to EN 61643-11 with remote signalling

- With remote signalling, potential-free changeover contact, for function monitoring
- Suitable for DC and AC systems
- With visual function display
- With easy mounting, screwless connection terminals
- In space-saving 17.5 mm grid
- Y circuit

Application: Universal use on 35 mm DIN profile rails in any standard distributor housing.



Master data		
Item number	5097822	
Description 1	Lightning barrier	
Description 2	with remote signalling	
Manufacturer	OBO	
Dimension	48V AC	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	6.63 kg	
Weight unit	kg/100 pc.	


Technical data sheet

MCR protection for 2-pole power supply with remote signalling, 48 V AC/DC

Item number: 5097822



Dimensions

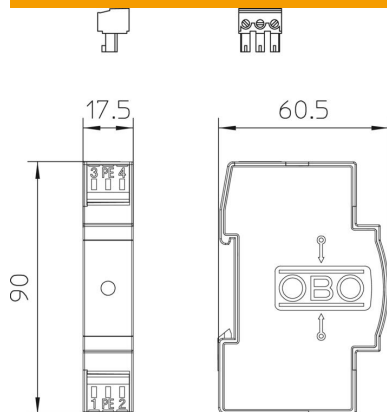

Technical data

Response time	<25 ns
Blow-out	no
Pole version	2
Structural width in division units (division unit, 17.5 mm)	1
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Remote signalling	yes
FM contacts	Changeover
Maximum continuous voltage AC	60 V
Maximum continuous voltage DC	80 V
Conductor cross-section, rigid (single-wire/multiwire), max.	2.5 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	0.14 mm ²
Lightning protection zone LPZ	2→3
Maximum discharge current (8/20 µs)	2 kA
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 µs)	0.7 kA
Nominal voltage AC (50/60 Hz)	48 V
Network form	Other
OBO_Nominal load current (input/ output terminal)	20 A
Pole number	3
Test class, type 3	yes
Protection rating	IP20
Protection level wire-wire	<220 V
Protection level wire-earth	<1200 V
Signalling on device	Visual
SPD to EN 61643-11	Type 3
SPD to IEC 61643-1	Class III