



# Technical data sheet

## Terminal strip set with screw terminals for SDB 12

Item number: 2008892

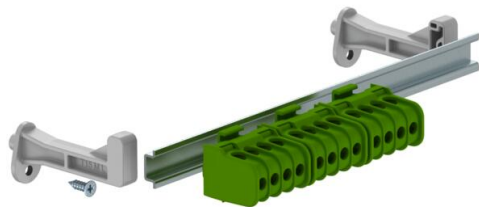

Terminal strip set for the small distributors of the SDB series. The sets can be used to expand and equip empty small distributors of the SDB 12... type series. The terminal strip set with screw terminals contains:  
Mounting instructions; hat rail with corresponding support and fastening material;  
16 mm<sup>2</sup> protective conductor terminal; 16 mm<sup>2</sup> neutral conductor terminal

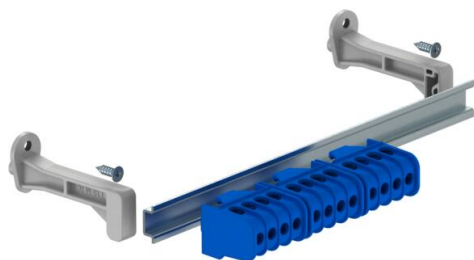

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 2008892                  |
| Type                               | KLS-SDB 12               |
| Description 1                      | Terminal strip pack      |
| Description 2                      | with screw terminals     |
| Manufacturer                       | OBO                      |
| Dimension                          | 184x15x4                 |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 22.37 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,0169 kg CO2e / 1 Piece |


# Technical data sheet

## Terminal strip set with screw terminals for SDB 12

Item number: 2008892



### Dimensions

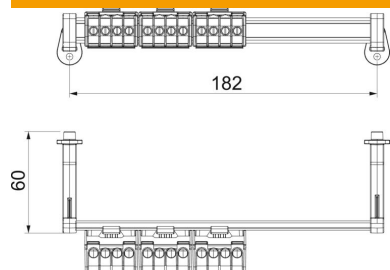

|        |         |
|--------|---------|
| Length | 184 mm  |
| Width  | 20.5 mm |
| Height | 31 mm   |

### Technical data

|                                        |                    |
|----------------------------------------|--------------------|
| Number of screwless terminals per pole | 12                 |
| Nominal cross-section, max.            | 16 mm <sup>2</sup> |
| Nominal cross-section, min.            | 6 mm <sup>2</sup>  |
| Nominal voltage                        | 450 V              |
| Nominal current                        | 100 A              |